

200W Triac Dimmbale Driver - PWM Output Version



Features

- Output constant voltage
- Universal AC input/ :180-240VA
- High efficiency :up to 87%
- Protections:short circuit/over loading/over current
- Full protection aluminum housing
- Easy installation
- Cooling by free air convection
- Work with leading edge and trailing edge TRIAC dimmers
- Strong compatibility, flicker-free dimming
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting


Specification

CE   IP66 SELV


Model		SC-200-12	SC-200-24
Output	DC Voltage	12V	24V
	Voltage Tolerance	±0.5V	
	Rated current	16.67A	8.33A
	Rated power	200W	
Input	Voltage Range	180～240V AC (100-130V AC can customized)	
	Frequency Range	47～63HZ	
	Power Factor (Typ.)	λ 0.6/220V	
	Full Load Efficiency (Typ.)	85%	86%
	AC Current (Typ.)	1.78A	1.76A
	Leakage current	<0.70mA/220VAC	
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed.	
	Over load	≤120%	
	Over Current	≤1.4*I out	
Environment	Working TEMP.	-40～+60℃	
	Working Humidity	20～90%RH,non-condensing	
	Storage TEM.,Humidity	-40～+80℃, 10～95%RH	
	TEMP.coefficient	±0.03%/℃ (0～50℃)	
	Vibration	10～500Hz 2G 10min./1 cycle, period for 60min.each along X,Y,Z axes	
Safety&EMC	Safety standards	EN61347-1 EN61347-2-13	
	Withstand voltage	I/P-O/P:3.75KVAC	
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25℃/70%RH	
	EMC EMISSION	Compliance to EN55015,EN61000-3-2 (≥50%load)	
	EMC IMMUNITY	EN61000-4-2,3,4,5,6,11 (Surge 4KV)	
Others	Weight	1.5Kg	
	Size	256*78*47mm (L*W*H)	
	packing	320*260*210mm 10 pieces in one carton	
Notes	1. All parameters NOT specially mentioned are measured at 220VAC input , rated load and 25℃of ambient temperature. 2..Tolerance:includes set us tolerance,line regulation and load regulation . 3. Loading should be 5-100%.		

200W Triac Dimmable Driver - PWM Output Version

■200W triac dimmable driver Mechanical Specification

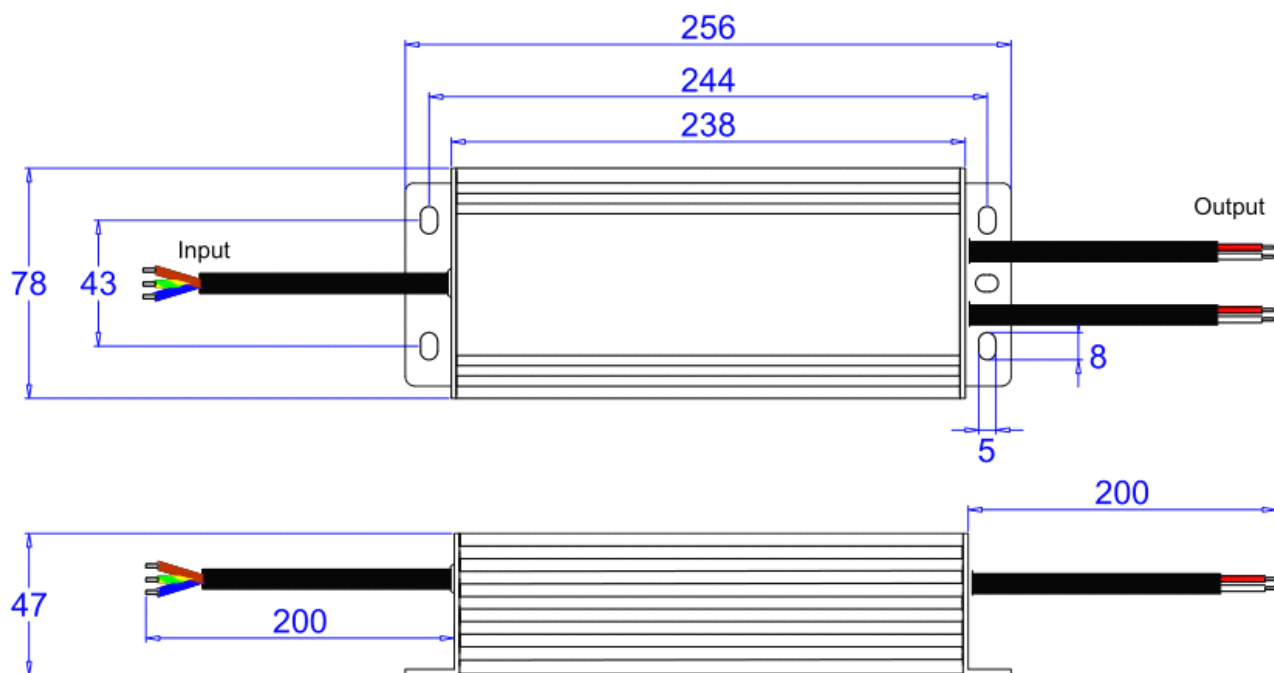

Model: KVP-12100-TD

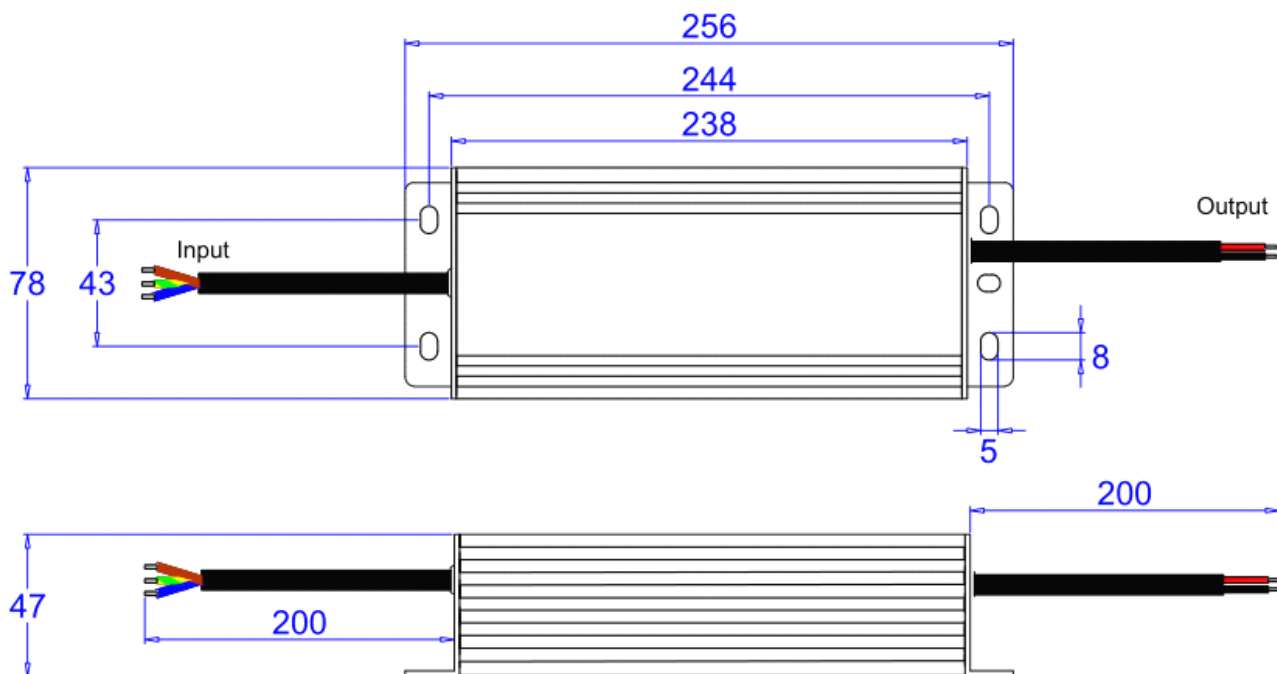

Model:KV-P24200-TD; KVP-36200-TD; KVP-48200-TD

※Input Brown with AC (L),Blue with AC (N)

※Output Red is (DIM+) ,Black is (DIM-)

※Note: Any other requests can be customized.

200W Triac Dimmable Driver - PWM Output Version


■ Dimming Operation

※The Pulse-Width Modulation (PWM) of output voltage can be adjusted through input terminal of the AC phase line(L) by connection a phase/triac dimmer.

※Compatible with most of Leading edge and a little kind of trailing edge triac dimmers. (To match only trailing edge dimmer can be customized.)


※Please try to use dimmers with power at least 3 times as the output power of the driver.

■ Derating Curve

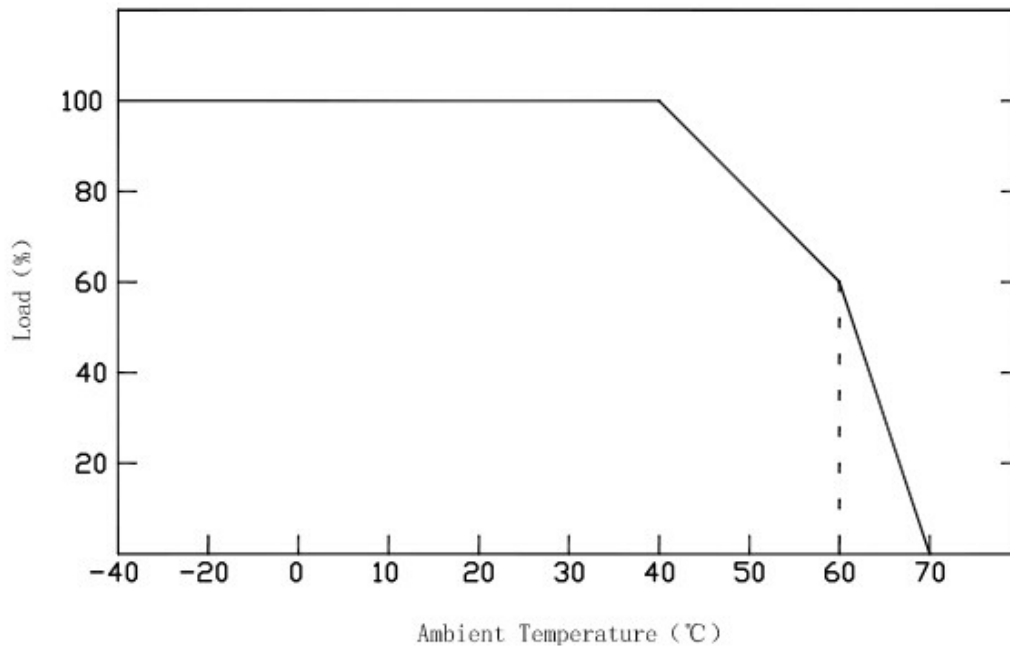

※To extend their life, please refer to the Derating Curve and derate according to the temperature.

■ Connecting Diagram

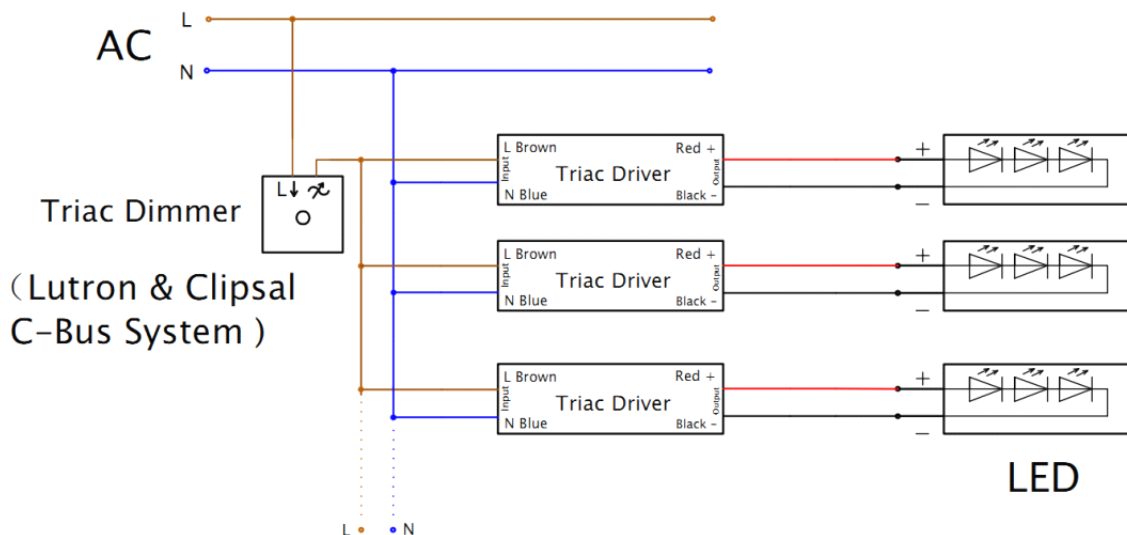

200W Triac Dimmbale Driver - PWM Output Version

