



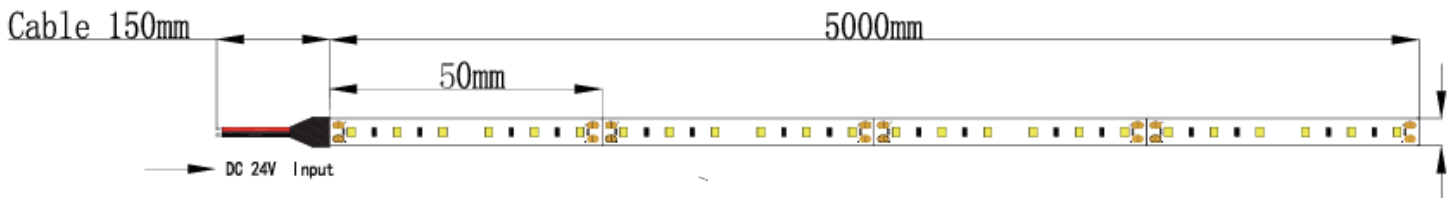

**SMD2835 120 LED 9.6W 24V**

**S96WW24 / S96NW24 / S96CW24 / WP96WW24 / WP96NW24 / WP96CW24**

**PRODUCT SPECIFICATION**

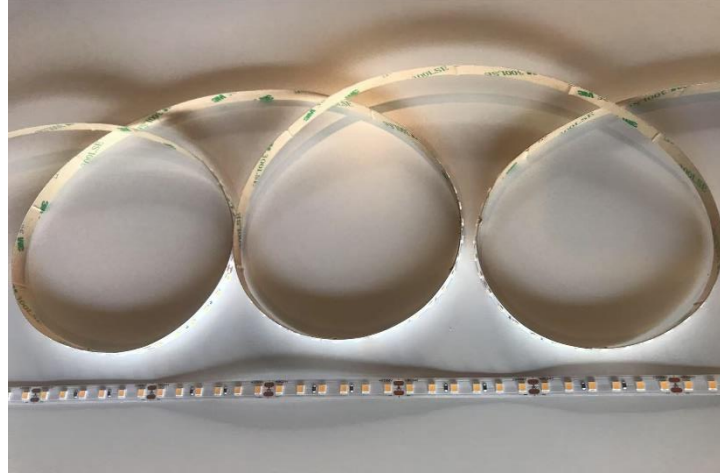

SPECIFICATION	
CODE IP20	S96WW24/ S96NW24/ S96CW24
CODE IP65	WP96WW24/ WP96NW24/WP96CW24
Voltage Power/m	9.6W/m
VOLTS INPUT	24VDC
AMPS INPUT	0.3873A/m, 0.3969A/m, 0.3885A/m, 0.4030A/m, 0.7670A/m, 0.3937A/m
COLOUR TEMP	3000K/4000K/6000K
BEAM ANGLE	120°
IP RATING	IP20 & IP65
DIM PWM	Yes
WORKING TEMPERATURE	-20°C ~ +45°C
Working humidity	40%-70%RH
LED TYPE	SMD2835
LEDs/meter	120
Lumen output/meter	845lm/m, 945lm/m, 840lm/m, 800lm/m, 865lm/m, 925lm/m
WARRANTY	3 years
Working hours	50,000hrs lifetime for Tc<70°C
MAX RUN LENGTH	5m
Minimum Cut	50mm (6 chips)
CRI	90+
Dimensions	L5000*W8 mm (16.4ft*0.4inch)
FIXING	3M double-sided tape



## Quality Affordable LED Lighting Solutions

Item code	Number of LED (m)	Voltage (DC)	Power (W/m)	CCT (K)	CRI (Ra)	Lumens Output (Lm/m)	IP Grade
S96WW24	120LEDs	24V	9.6W	3000K	90+	845Lm	IP20
S96NW24	120LEDs	24V	9.6W	4000K	90+	945Lm	IP20
S96CW24	120LEDs	24V	9.6W	6000K	90+	840Lm	IP20
WP96WW24	120LEDs	24V	9.6W	3000K	90+	800Lm	IP65
WP96NW24	120LEDs	24V	9.6W	4000K	90+	865Lm	IP65
WP96CW24	120LEDs	24V	9.6W	6000K	90+	925Lm	IP65

### Attention:

This linear LED product must be installed using a suitable Pro LED Lighting or equivalent approved LED mounting profile/channel to ensure proper heat dissipation. Improper installation may significantly reduce the LED's lifespan, cause color changes, and void the warranty.

Although Pro LED Lighting has taken care to provide accurate information, it cannot accept liability for any errors. The company also reserves the right to change or remove product details without prior notice.